








99.60 BLAWHI

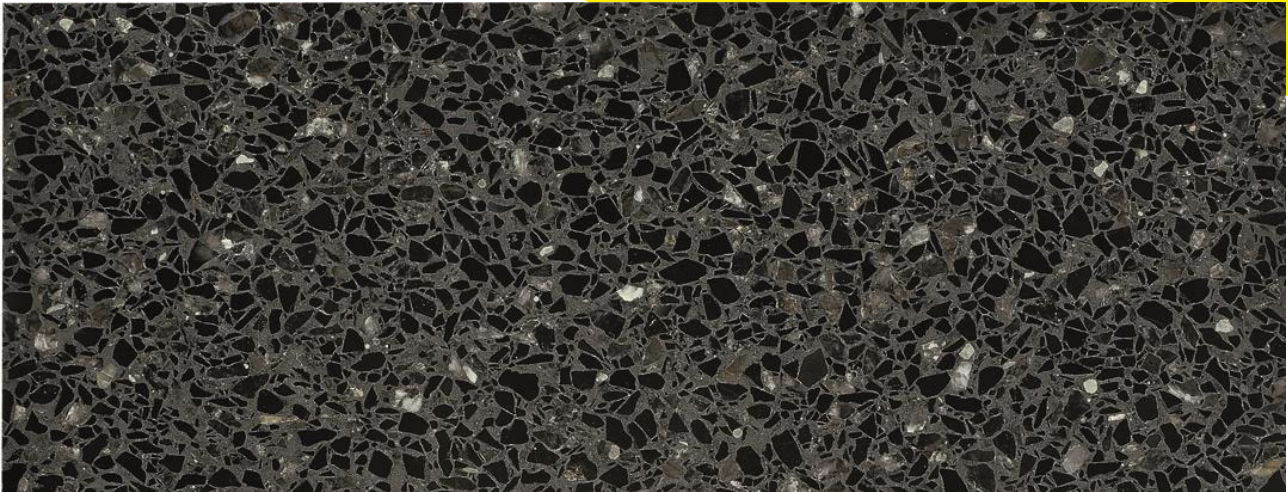

| | NORM NORMA STANDARD | NORM VORGESCHRIEBENER WERTE VALORI PRESCRITTI DALLA NORMA NORM REQUIRED VALUES | EUVAL® WERTE VALORI EUVAL® EUVAL® VALUES |
|--|----------------------------------|---|---|
|  BIEGEZUGFESTIGKEIT RESISTENZA ALLA FLESSIONE FLEXION RESISTANCE | DIN EN 13748-1 | ≥ 5 N/mm ² | 7,9 N/mm ² |
|  SCHLEIFVERSCHLEIß RESISTENZA ALL'ABRASIONE ABRASION RESISTANCE | DIN EN 13748-1 | < 30 cm ³ / 50 cm ² | 16,1 cm ³ / 50 cm ² |
|  WASSERAUFNAHME ASSORBIMENTO D'ACQUA WATER ABSORPTION | DIN EN 13748-1 | < 8 % | 3,3 % |
|  RUTSCHEMMENDE KLASSE BRG 181 CLASSE DI RESISTENZA ALLO SCIVOLO CLASSIFICATION OF ANTI SLIP PROPERTIES | DIN 51130 | | R9 R10 R11 |
|  BRANDVERHALTEN RESISTENZA AL FUOCO FIRE RESISTANCE | DIN EN 13748-1 | A1 fl NICHT BRENNBAR NON INFIAMMABILE NOT FLAMMABLE | A1 fl NICHT BRENNBAR NON INFIAMMABILE NOT FLAMMABLE |
|  GEWICHTE PESO SPECIFICO APPARENTE SPECIFIC GRAVITY | | | 2.600 kg/m ³ |

Für die Original Zertifikate stellen Sie sich mit Euragglo s.r.l. in Verbindung.

Per i certificati originali, contattare Euragglo s.r.l.

For the original certificates, please contact Euragglo s.r.l.



DIN V 18500
DIN EN 13748-1