



## 81.60 KAYAN

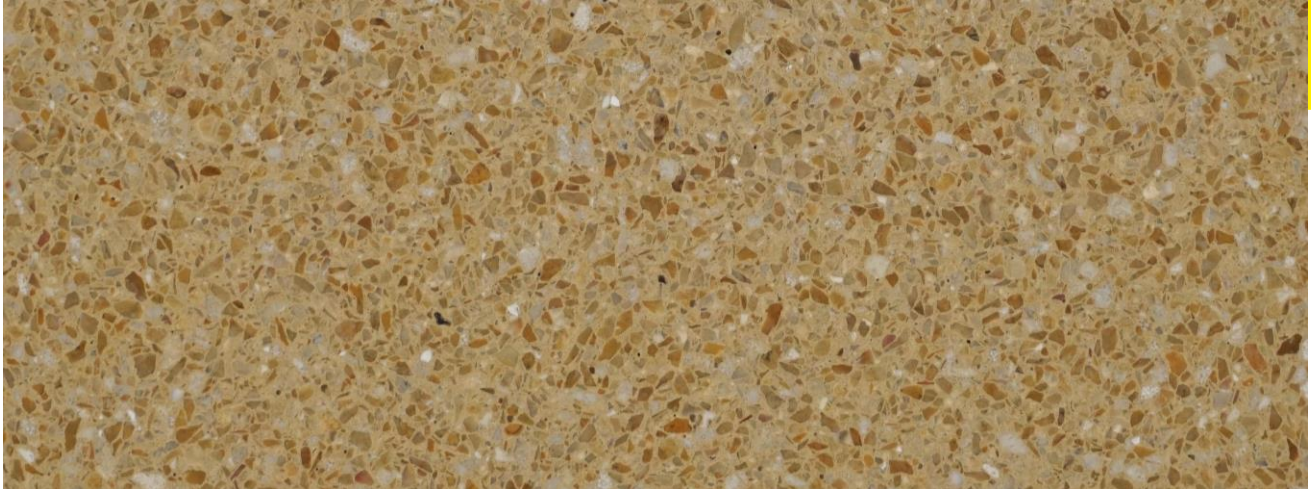

	<b>NORM</b> NORMA STANDARD	<b>NORM</b> <b>VORGESCHRIEBENER WERTE</b> VALORI PRESCRITTI DALLA NORMA NORM REQUIRED VALUES	<b>EUVAL® WERTE</b> VALORI EUVAL® EUVAL® VALUES
 <b>BIEGEZUGFESTIGKEIT</b> RESISTENZA ALLA FLESSIONE FLEXION RESISTANCE	DIN EN 13748-1	≥ 5 N/mm <sup>2</sup>	8,3 N/mm <sup>2</sup>
 <b>SCHLEIFVERSCHLEIß</b> RESISTENZA ALL'ABRASIONE ABRASION RESISTANCE	DIN EN 13748-1	< 30 cm <sup>3</sup> / 50 cm <sup>2</sup>	18,2 cm <sup>3</sup> / 50 cm <sup>2</sup>
 <b>WASSERAUFNAHME</b> ASSORBIMENTO D'ACQUA WATER ABSORPTION	DIN EN 13748-1	< 8 %	5,7 %
 <b>RUTSCHEMMENDE KLASSE BRG 181</b> CLASSE DI RESISTENZA ALLO SCIVOLO CLASSIFICATION OF ANTI SLIP PROPERTIES	DIN 51130		R9 R10 R11
 <b>BRANDVERHALTEN</b> RESISTENZA AL FUOCO FIRE RESISTANCE	DIN EN 13748-1	A1 <sub>fl</sub> NICHT BRENNBAR NON INFIAMMABILE NOT FLAMMABLE	A1 <sub>fl</sub> NICHT BRENNBAR NON INFIAMMABILE NOT FLAMMABLE
 <b>GEWICHTE</b> PESO SPECIFICO APPARENTE SPECIFIC GRAVITY			2.600 kg/m <sup>3</sup>

Für die Original Zertifikate stellen Sie sich mit Euragglo s.r.l. in Verbindung.

Per i certificati originali, contattare Euragglo s.r.l.

For the original certificates, please contact Euragglo s.r.l.

